


LUMENRAIL®

Quotation Request Form

Another Lumenrail® Document for Life Safety and Light

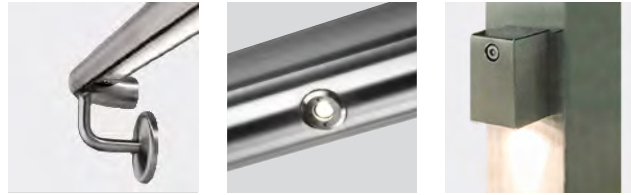

Want to reduce the turn-around time on your quote request? It has been proven that completing this form and providing highlighted drawings speed it up by 1-2 days. **Please return this form to rfq@mailwagner.com**

Quotation Due Date:				Date Requested On Site:		
Company Name:				Contact Name:		
Email:				Phone:		
Project Name:				Project Location:		
Project Status:	<u>Budget Phase</u>	<u>Out to Bid</u>	<u>Ground Break/Ground Broken</u>	<u>Remodel of Existing</u>		
Specifier:				Specifier Contact Name:		
Quote Type:	<u>Budget Phase Cost</u>	<u>Solid Bid Required</u>				
Service Options:	<u>Field Measure</u>	<u>Job Site Support</u>	<u>System Installation</u>			

Approximate Linear Footage:	Illuminated Rail - Post Mount	LF
	Illuminated Rail - Wall Mount	LF
	Non-Illuminated Rail - Post Mount	LF
	Non-Illuminated Rail - Wall Mount	LF
EXAMPLE - 12', 16', 8'-6" LF	No Handrail, Lighting Quote Only	QTY.

(Please list each unique railing run length. Stops and starts have bearing on quotes.)

Lumenrail® Handrail Material Specification (Metal, Alloy, Outside Diameter and Finish)

Select One Stainless Steel Material:	OR	Select One Aluminum Material:
316 Stainless Steel		6063 Aluminum
Select One Diameter:		Select One Diameter:
1.90" OD 1.66" OD 1.50" OD		1.90" OD 1.66" OD (wall mount only)
Select One Finish:		Select One Finish:
#4 Satin, Circumferential Brushed		Clear Anodized (Silver)
#4 Satin, Longitudinal Brushed +\$		Bronze Anodized (Duranodic)
#7 Brite, Polished +\$\$		

Lumenlinear™ Fixture Specification - LULS (Color, Control, Wattage, Distribution and Lens Finish)

Select One CCT:	2700 K	3000 K	3500 K	4000 K	5000 K	Amber	Blue	Green	Red
Select Dimming:	Yes	No							
			Select One Wattage:						
			2 Watts/FT	4 Watts/FT	6 Watts/FT				
Select One Distribution Combination:	70° Symmetric	120° Symmetric	Asymmetric (45° above nadir)						
				Select One Lens Finish:					
				Matte	Transparent				

Lumenpod® 16 Fixture Specification - LULF (Color, Control, Drive Current and Distribution) * Indicates stock options

Select One CCT:	2700 K*	3000 K*	4000 K*	5000 K	Amber	Blue	Green	Red
Select Dimming:	Yes	No						
			Select One Drive Current:					
			350 mA*	500 mA*				
				Select One Distribution Optic:				
				16°	23°	46°	70°*	94°

@wagnercompanies

LUMENRAIL®

Quotation Request Form

Another Lumenrail® Document for Life Safety and Light



Lumenpod®28 Fixture Specification - LULR (Color, Rail Diameter, Control, Drive Current and Distribution)

US PAT. #10,612,734 B2

Select One CCT:	2700 K	3000 K	4000 K	5000 K	Amber	Blue	Green	Red
Select Dimming:	Select One Rail Diameter:			Select One Drive Current:		Select One Distribution Optic:		
Yes No	1.50" D	1.66" D	1.90" D	350 mA	500 mA	Symmetric	Asymmetric	

Lumenpod®30 Fixture Specification - LULV (Color, Control and Drive Current)

* Indicates stock options

Select One CCT:	2700 K*	3000 K*	4000 K*	5000 K	Amber	Blue	Green	Red
Select Dimming:	Select One Drive Current:			Note: 1.90" Diameter Post Only				
Yes No	350 mA*	500 mA*						

Bantam™ Fixture Specification - LULF (XTR or XTF) (Color, Control, Drive Current and Distribution) * Indicates stock options

Select One CCT:	2700 K*	3000 K*	4000 K*	5000 K	Amber	Blue	Green	Red
Select Dimming:	Select One Drive Current:			Select One Distribution Optic:				
Yes No	350 mA*	500 mA*		16°	23°	46°	70°*	94°
								XTR* - Radius Back
								XTF* - Flat Back

Bantam™ SQ Fixture Specification - LULF (XTS) (Color, Control, Drive Current and Distribution)

* Indicates stock options

Select One CCT:	2700 K*	3000 K*	4000 K*	5000 K	Amber	Blue	Green	Red
Select Dimming:	Select One Drive Current:			Select One Distribution Optic:				
Yes No	350 mA*	500 mA*		16°	23°	46°	70°*	94°

Standard 100 Watt Drivers & NEMA Enclosures included on quote. Quantity based on design, wattage and/or spacing. Alternate listed driver and enclosure options are available if requested. Please review our Lumengear program for specific options.



LUMENRAIL®

For Life Safety and Light™

Taylor Yard "Rumblefish" Bridge
 City of Los Angeles
 Architect: SPF
 Photo © Mike Kelly

@wagnercompanies

WAGNER
Architectural Systems


888-243-6914 // rfq@mailwagner.com
 10600 West Brown Deer Road // Milwaukee, WI 53224, USA

© 2023 R&B Wagner, Inc. All Rights Reserved.
 WagnerCompanies.com
 ARS LQR R7

LUMENRAIL®

Quotation Request Form

Another Lumenrail® Document for Life Safety and Light

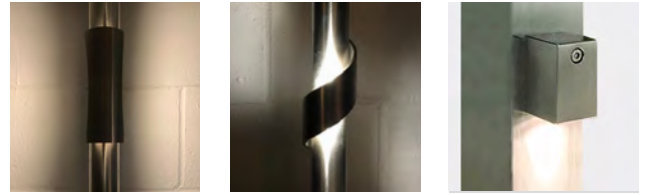


Aura Post Sconce Specification - LUAU (Color, Post Diameter, Control, Drive Current) * Indicates stock options

Select One CCT: 2700 K* 3000 K* 4000 K* 5000 K Amber* Blue* Green Red

Select Dimming: Yes No | Select One Post Diameter: 1.66" D 1.90" D | Select One Drive Current: 350 mA 500 mA

The Aura Post Sconce Family of Luminaires are Only Available on Fully Fabricated Lumenrail Systems

Aura Post Sconce Housing Selection - LUAU (Base or Incised or Base + Custom)

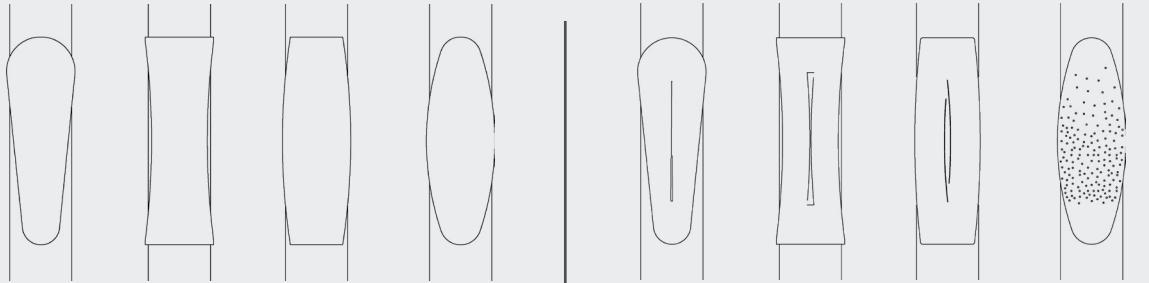

Rise	Concave	Convex	Ellipse	Rise Incised	Concave Incised	Convex Incised	Ellipse Incised	Custom Incised Options:
RS	CV	CX	EP	RS - IN	CV - IN	CX - IN	EP - IN	Submit finished, tabbed designs for approval, or artwork for additional translation fee.
								- CI

Housing Finish: SB4 - Satin Brush #4 BLM - Blast Matte


Cuff Post Sconce Specification - LUCF (Color, Control and Drive Current) * Indicates stock options

Select One CCT: 2700 K* 3000 K* 4000 K* 5000 K Amber* Blue* Green Red

Select Dimming: Yes No | Select One Post Diameter: 1.66" D 1.90" D | Select One Drive Current: 350 mA 500 mA

The Cuff Post Sconce Family of Luminaires are Only Available on Fully Fabricated Lumenrail Systems

Cuff Post Sconce Housing Selection - LUCF (Base or Incised or Base + Custom)

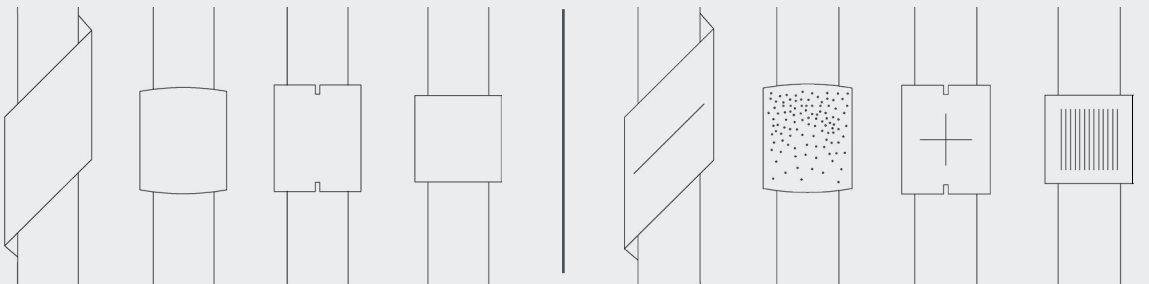

Wrap	Arc	Crown	Square	Wrap Incised	Arc Incised	Crown Incised	Square Incised	Custom Incised Options:
WP	AC	CW	SQ	WP - IN	AC - IN	CW - IN	SQ - IN	Submit finished, tabbed designs for approval, or artwork for additional translation fee.
								- CI

Housing Finish: SB4 - Satin Brush #4 BLM - Blast Matte

Standard 100 Watt Drivers & NEMA Enclosures included on quote. Quantity based on design, wattage and/or spacing. Alternate listed driver and enclosure options are available if requested. Please review our Lumengear program for specific options

@wagnercompanies